www.cnzongheng.com 大圣纵横® DASHENG ZONGHENG




CT-300 ▶▶

手动液压胀管器

Hydraulic Tube Expander

专利产品 PATENTED

操作示意图 Operation Guide

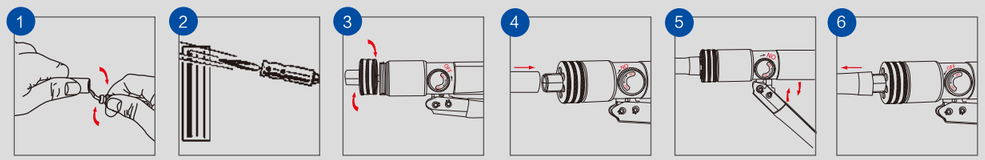

SIX EASY STEPS:

- ★Deburr inside of tube.
- ★Anneal the tube if necessary(for hard or thickwall tube).
- ★Screw the expander head on expander.
- ★Put the end of tube on expander head.
- ★Tighten the relief valve knob to‘ON’position then pump handle until tube is expanded to the end.
- ★Turn the relief valve knob to‘OFF’position to loosen expander head.remove expanded tube.

简单操作六步骤:

- ★除去管内毛刺
- ★如果有必要，给管子退火(用于硬管或者厚管)。
- ★将胀头旋到胀管器上
- ★将管子末端放到胀头上
- ★将减压阀旋钮向‘ON’方向并扭紧，然后反复压动手柄直到管子完全胀开。
- ★将减压阀旋钮旋至‘OFF’位置松开胀头，取下胀好的管子。



CT-300AL



CT-300A

产品技术参数 Technical Parameter

型 号 Item No.	品 名 规 格 Description		
CT-300A	Normal	CT-300A+WK-532+CT-209	For inch: 3/8",1/2",5/8",3/4",7/8",1",1-1/8" O.D.Tubing
CT-300M	Normal	CT-300M+WK-532+CT-209	For metric: 10mm,12mm,16mm,19mm,22mm,25mm,28mmm O.D.Tubing
CT-300AL	New	CT-300A+WK-650+CT-209 +WK-207+CT-300PL	For inch: 3/8",1/2",5/8",3/4",7/8",1",1-1/8",1-1/4",1-3/8",1-1/2", 1-5/8" O.D.Tubing
CT-300ML	New	CT-300M+WK-650+CT-209 +WK-207+CT-300PL	For metric: 10mm,12mm,16mm,19mm,22mm,25mm,28mm,32mm,35mm, 38mm,42mm O.D.Tubing

新型自动定心式胀头

NEW Expander Heads



1/4"



2-1/8"

新型备用胀头 NEW Spare Expander Heads			
Inch	英 制	Metric	公 制
N100A-01	For inch:3/8"	N100M-01	For metric:10mm
N100A-02	For inch:1/2"	N100M-02	For metric:12mm
N100A-03	For inch:5/8"	N100M-03	For metric:16mm
N100A-04	For inch:3/4"	N100M-04	For metric:19mm
N100A-05	For inch:7/8"	N100M-05	For metric:22mm
N100A-06	For inch:1"	N100M-06	For metric:25mm
N100A-07	For inch:1-1/8"	N100M-07	For metric:28mm
N100A-08	For inch:1-1/4"	N100M-08	For metric:32mm
N100A-09	For inch:1-3/8"	N100M-09	For metric:35mm
N100A-10	For inch:1-1/2"	N100M-10	For metric:38mm
N100A-11	For inch:1-5/8"	N100M-11	For metric:42mm
N100A-12	For inch:1-3/4"	N100M-45mm	For metric:45mm
N100A-13	For inch:2"	N100M-50mm	For metric:50mm
N100A-14	For inch:2-1/8"	N100M-54mm	For metric:54mm
N100A-1/4"	For inch:1/4"	N100M-6mm	For metric:6mm
N100A-5/16"	For inch:5/16"	N100M-8mm	For metric:8mm